


TRAILER MOVING FLOOR STANDARD



**BEHIND YOU
ALL THE WAY**

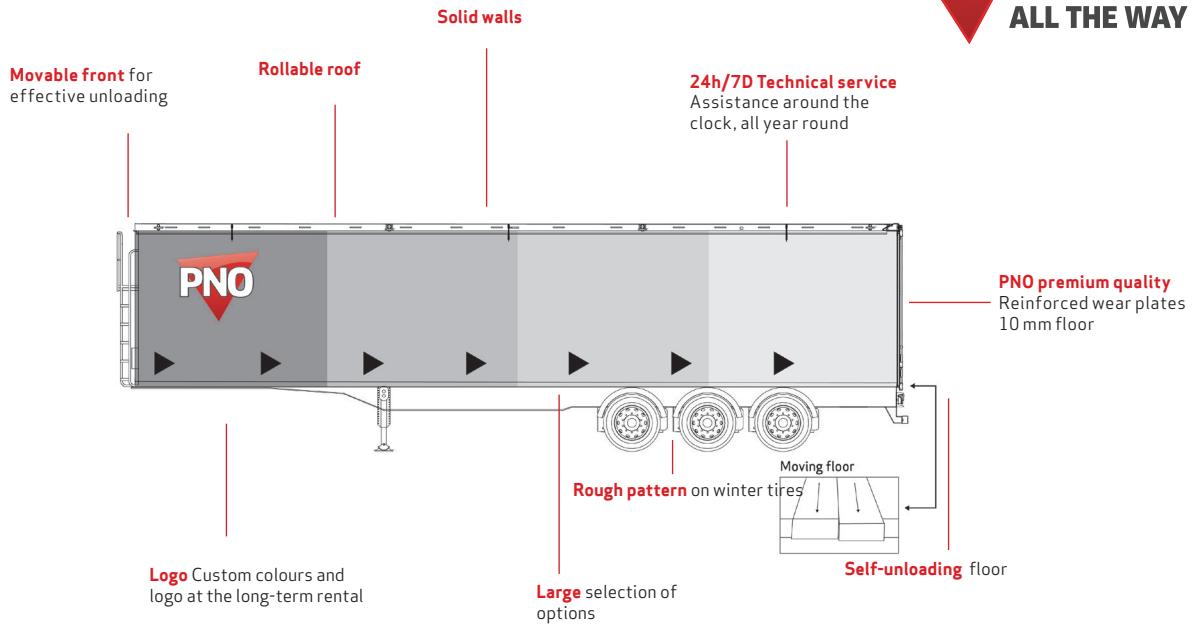

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------|---------------------------|---------------------|
| Length outside/inside | 14.010 mm/13.535 mm | |
| Width outside/inside | 2.550 mm/2.480 mm | |
| Height outside/inside | 4.000 mm/2.732 mm | |
| 5th wheel height | 1.100 mm | |
| Own weight | 8.120 kg | |
| Total weight | 39.000 kg | Technical 42.000 kg |
| Axle load | 24.000 kg | Technical 27.000 kg |
| Kingpin load | 15.000 kg | |
| Wheelbase | 8.135 mm | |
| Distance axles | 1.310 mm/1.310 mm | |
| BPW axles with drum brakes | | |
| Tires | 385/65R 22,5 winter tires | |
| Cubic volume | 91,7 m ³ | |

EQUIPMENT

- Lashing rings 13 pairs
- Ferry schackles
- Cargo Floor 10 mm aluminum, truck bearing
- Tool box
- Designed for three-axle tractor
- Hookes for snow chains
- Reinforced sides inside/back
- Roof reinforced with Carapax
- Liftable axle

OPTIONAL

- With long wheel base
- Hardox floor
- Inspection door front
- Domestic height
- Lift
- Wireless remote
- Hydraulic roof
- Floorsheet



HERE ARE PNO TRAILERS, DEPOTS AND WORKSHOPS

PNO SVERIGE AB HELSINGBORG GOTHENBURG
+46 42-499 15 50
www.pno.se

JÖNKÖPING MALMÖ

SUB-DEPOTS
ÅKERS STYCKEBRUK
ÖREBRO