TRAILER
REEFER

BEHIND YOU
ALL THE WAY

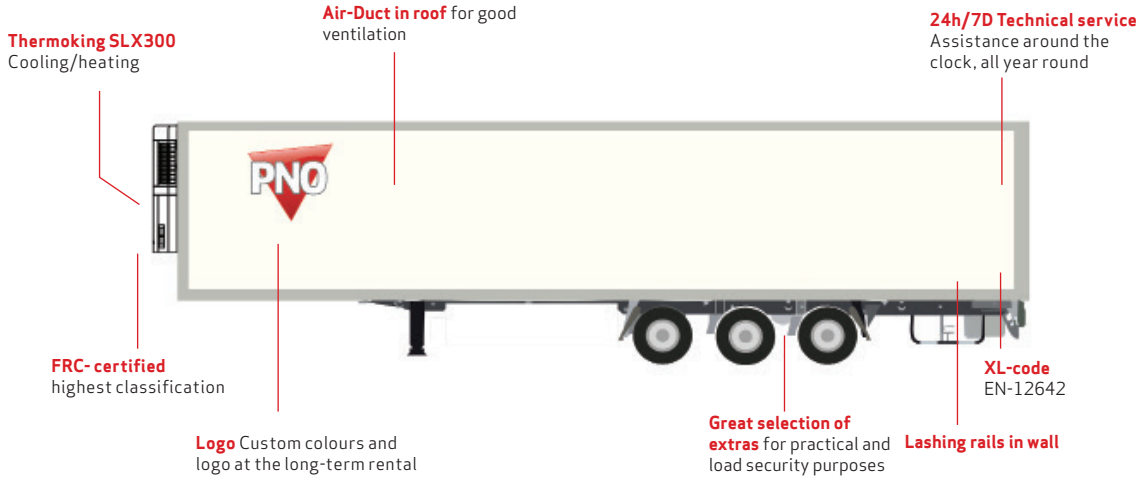

TECHNICAL SPECIFICATIONS		
Length outside/inside	13.900 mm/13.310 mm	
Width outside/inside	2.600 mm/2.500 mm	
Height outside/inside	4.020 mm/2.650 mm	
Loading height rear	2.650 mm	
Loading width rear	2.500 mm	
5th wheel height	1.150 mm	
Own weight	8.950 kg	
Total weight	39.000 kg	Technical 42.000 kg
Axle load	24.000 kg	Technical 27.000 kg
Kingpin load	15.000 kg	
Axles	BPW 3 x 9 ton drum brakes	
Wheelbase	7.875 mm	
Distance axles	1.310 mm/1.310 mm	
Tire size	385/65 R 22.5	
Roof	45 mm	
Front wall	50 mm	
Side walls	45 mm	
Back doors	90 mm	

EQUIPMENT
Lashing rails in wall 835 mm
Ferry schakle
ADR-sign
Aluminum floor
Spare wheel carrier
Thermoking SLX 300
Fuel tank 240 liters
Ventilation wall
Ventilation flap
Kick strip 300 mm
Interior lighting

OPTIONAL
Dual evaporator
Lift
Partition wall
Domestic height
Huckepack execution
Beams for double loading
Liftable axle
Designed for three-axle tractor
Self-steering rear axle
Lashing rails in floor

HERE ARE PNO TRAILERS, DEPOTS AND WORKSHOPS

PNO SVERIGE AB **HELSINGBORG** **GOTHENBURG** **JÖNKÖPING** **MALMÖ**
+46 42-499 15 50
www.pno.se

SUB-DEPOTS
ÅKERS STYCKEBRUK
ÖREBRO