TRAILER
REEFER WITH FOLDABLE SIDE DOORS

BEHIND YOU ALL THE WAY

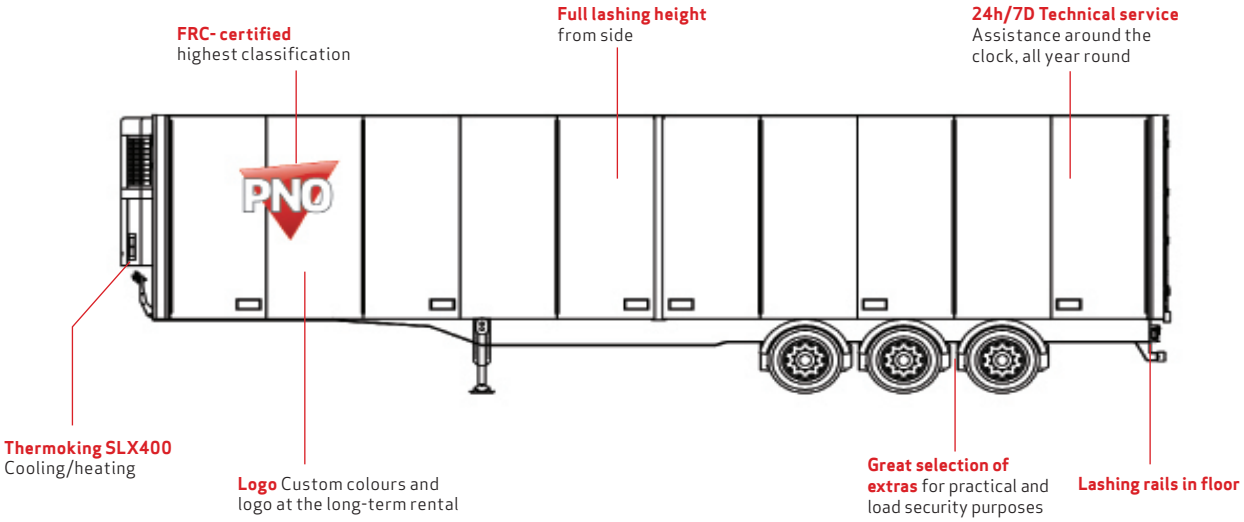

TECHNICAL SPECIFICATIONS		
Length outside/inside	13.600 mm/13.350 mm	
Width outside/inside	2.600 mm/2.450 mm	
Height outside/inside	4.030 mm/2.600 mm	
Loading height rear	2.580 mm/2.580 mm	
Loading width rear	2.450 mm	
5th wheel height	1.100 mm	
Own weight	9.900 kg	
Total weight	42.000 kg	Technical 45.000 kg
Axle load	24.000 kg	Technical 27.000 kg
Kingpin load	18.000 kg	
Axles	BPW 3x9 ton drum brakes	
Wheelbase	7.700 mm	
Distance axles	1.360 mm/1.360 mm	
Tire size	385/55 R 22.5	
Roof	134 mm	
Front wall	104 mm	
Side walls	70 mm	
Side doors	65 mm	
Back doors	84 mm	

EQUIPMENT
Lashing rails in floor
Lashing rail in the wall 1.050 mm
Ferry schakle
ADR-sign
Aluminum floor
Spare wheel carrier
Thermoking SLX 400e
Tool box
Fuel tank 240 liters
Ventilation wall
Ventilation flap
Kick strip 300 mm
Interior lighting

OPTIONAL
Dual evaporator
Lift
Partition wall
Domestic height
Huckepack execution
Beams for double loading
Liftable axle
Designed for three-axle tractor
Self-steering rear axle

HERE ARE PNO TRAILERS, DEPOTS AND WORKSHOPS

PNO SVERIGE AB **HELSINGBORG** **GOTHENBURG** **JÖNKÖPING** **MALMÖ**
+46 42-499 15 50
www.pno.se

SUB-DEPOTS
ÅKERS STYCKEBRUK
ÖREBRO